

<b>MODEL</b> <b>AKG0609</b>	<b>JINAN ACCTEK MACHINERY CO.,LTD</b>
	<b>2-712 SLIVER JING BULD, SHIZHONG District, Jinan, China</b>
	<b>TEL: +86-531-86160023 FAX: +86-531-86160023</b>

**PRICE LIST**

<b>COMMODITY&amp;DESCRIPTION</b>	<b>UNIT PRICE (USD)</b>	<b>QUANTITY</b>	<b>TOTAL AMOUNT (USD)</b>
<b>AKG0609 CNC Router</b> <b>(#Working area: 600*900*150mm</b>  <b>#Spindle: 2.2kw water cooling spindl e</b>  <b>#Control system: Mach3</b>  <b>#Drive system: Leadshine stepper m otors and drivers</b>  <b>#Transmission: Taiwan TBI ball scr ew</b>  <b>#Rail guide: Taiwan Hiwin linear sq uare rail guide</b>  <b>#Table: T-slot table with cast iron b ody, machine bed</b>  <b>#Inverter: Fuling inverter</b>  <b># 4 axis Rotary :diameter 80mm,le ngth 600mm</b>  <b>)</b>	<b>2880</b>	<b>1SET</b>	<b>2880</b>
<b>Optional: Water tank</b>	<b>120</b>		<b>3000</b>


<b>Optional:DSP controller</b>	<b>250\$</b>		
--------------------------------	--------------	--	--

### Suitable Materials

AKG 0609 CNC router is the perfect choice for the home shop Machinist, Sign maker .Artist, Engraver, Panel maker. or Educational institution who needs an affordable CNC router with 2D& 3D CAD/CAM machining capabilities. The AKG0609 CNC router is small enough to fit into almost any work space.

### PARAMETERS

NO.	Description	Parameter
1	X,Y,Z Working Area	600x900x150mm
2	Table Size	890X1200mm
3	X,Y,Z Traveling Positioning Accuracy	±0.03/300mm
4	X,Y,Z repositioning Positioning Accuracy	±0.02mm
5	Table Surface	T-slot Extrusions
6	Frame	Cast Steel
7	X, Z Structure	Ball Screw
8	Y Structure	Hiwin Rail Linear Bearings and Ball Screw
9	Max. power Consumption	0.8Kw
10	Max. Rapid Travel Rate	6000mm/min
11	Max. Working Speed	4000mm/min
12	<b>Spindle Power Motor</b>	<b>2.2Kw spindle</b>
13	Spindle Speed	0-24000RPM
14	<b>Drive Motors</b>	<b>Stepper system</b>
15	<b>Working Voltage</b>	<b>AC220V/50/60Hz</b>
16	Command Language	G code
17	<b>Operating System</b>	<b>Mach3(optional:DSP or NC-Studio)</b>
18	Interface	USB
19	Flash Memory	128M(U Disk)
20	Collet	ER16

			
21	<b>X,Y Resolution</b>	<b>&lt;0.01mm</b>	
22	<b>Software Compatibility</b>	<b>Type3 software, (Option: Artcam software)</b>	
23	<b>Running Environment</b>	<b>Temperature: 0℃~45℃</b> <b>Relative humidity: 30%~75%</b>	
24	<b>Packing Size</b>	<b>1370 x 970 x 970mm</b>	
25	<b>Net Weight</b>	<b>180KG</b>	
26	<b>Gross Weight</b>	<b>230KG</b>	













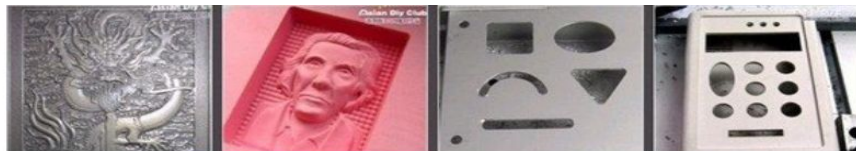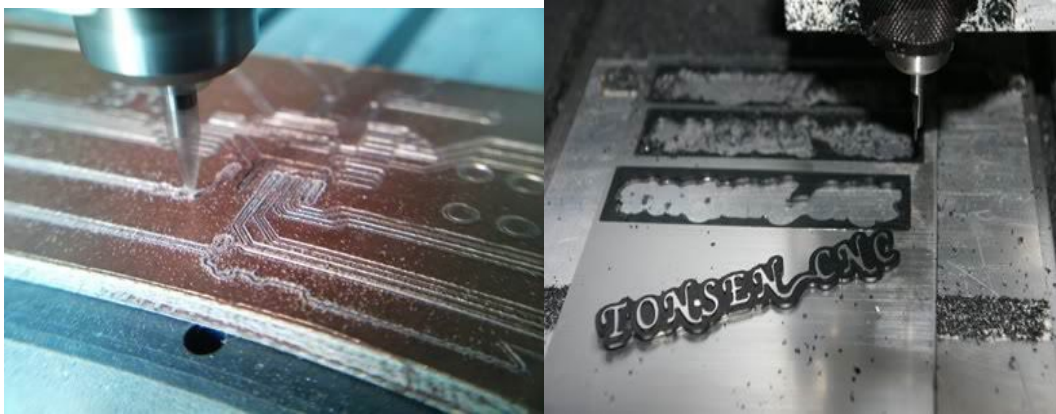

PVC



DOUBLE COLOR BOARDS



WOOD



CARBON FIBER REINFORCED  
PLASTICS PLATE

**Contact Information:**

**Andy Liu**

**TEL: +86-531-86160023**

**FAX: +86-531-86160023**

**Email: [export06@acctekcnc.com](mailto:export06@acctekcnc.com)**

**Website : [www.acctekcnc.com](http://www.acctekcnc.com)**

**Skype: andylasers**